



ITEM NO.	QTY. -041	QTY. -042	PART NUMBER	DESCRIPTION
1	X		D4038-041	ANGLE ASSEMBLY, FWD, LH
2		X	D4038-042	ANGLE ASSEMBLY, FWD, RH
3	1		D4038-1	ANGLE, FWD, LH
4		1	D4038-2	ANGLE, FWD, RH
5	1		D4038-5	BLOCK
6		1	D4038-6	BLOCK
7	1		D4038-9	BLOCK
8		1	D4038-10	BLOCK
9	2	2	AN3-14A	BOLT
10	2	2	MS21042L3	NUT
11	4	4	NAS1149D0363J	WASHER

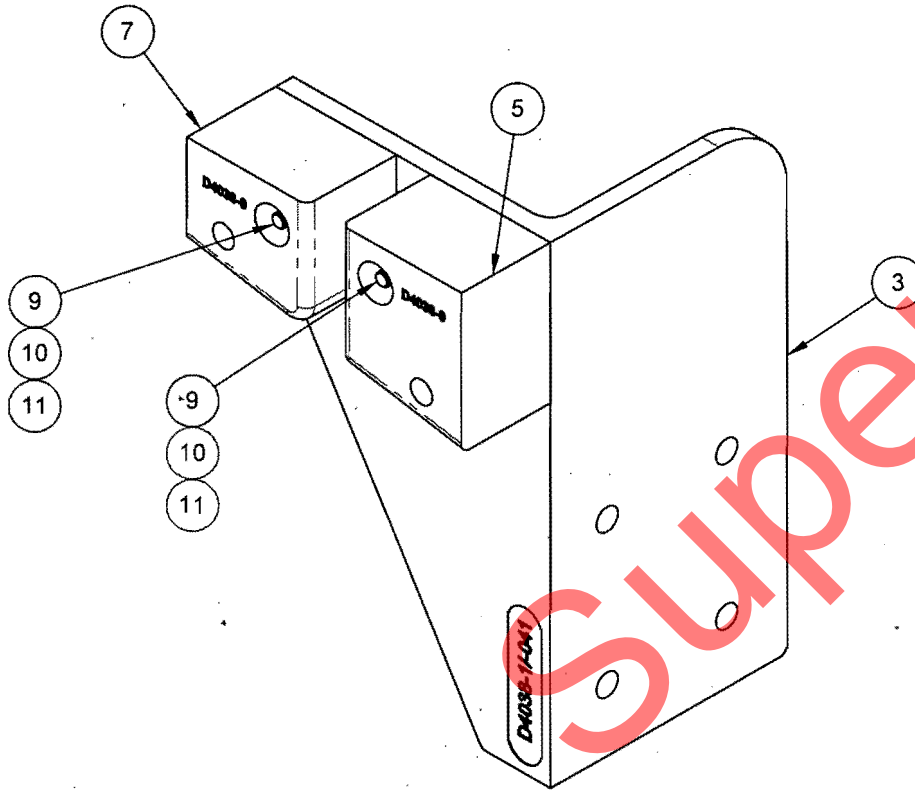

D4038-041 ANGLE ASSEMBLY, FWD, LH

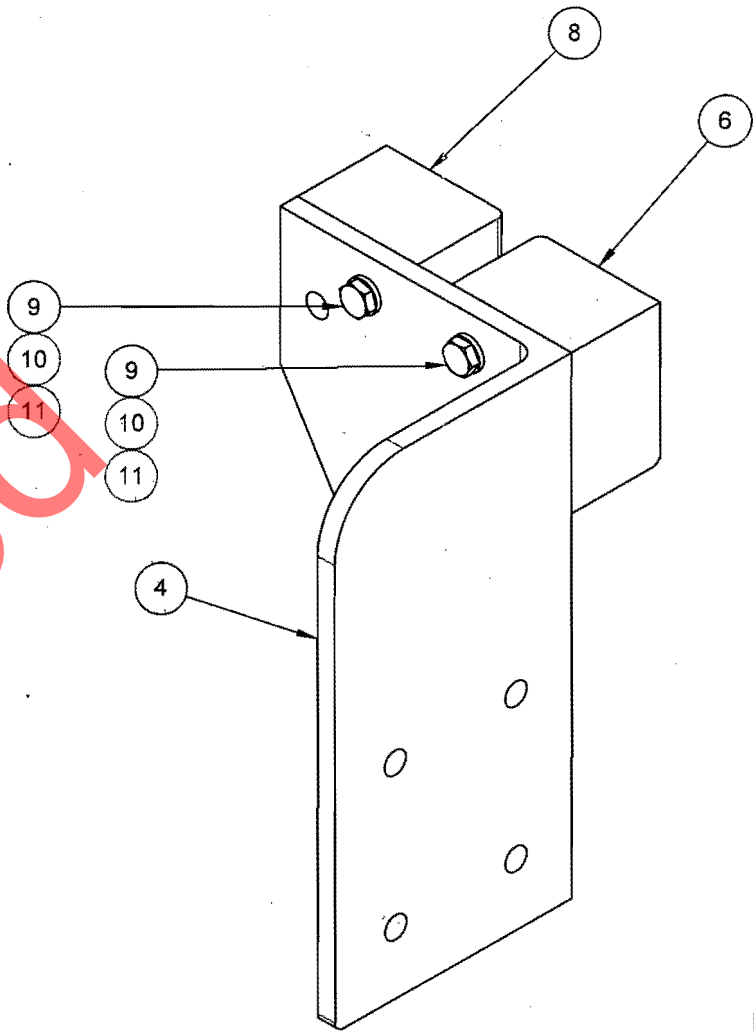

D4038-042 ANGLE ASSEMBLY, FWD, RH

UNDER REVIEW

11.01.19

PER NCR 16-309

ONLY AFFECTS D4038-041/-042/-3/-4

RELEASED

2010-04-14


MD

NOTES:


- 1) MATERIAL: N/A
- 2) FINISH: POWDER COAT "WHITE" (4.3.5.1) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: -041 - 1.76 lbs
-042 - 1.74 lbs

B	REVISED DIMENSIONS ALL SHEETS, ADD Ø0.316 HOLES IN -1/-2/-3/-4 PARTS, ADD RADIUS TO -1/-2/-3/-4 PARTS	10.01.05
A	NEW ISSUE	HS 09.12.14
REV.	DESCRIPTION	BY DATE
DESIGN		
DRAWN		
CHECKED		
MFG. APPR.		
APPROVED		
DE APPR.		
DATE	10.01.05	
DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA		
DRAWING NO. D4038		REV. B
TITLE BRACKET		SHEET 1 OF 14
SCALE NTS		
COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD		

ITEM NO.	QTY. -043	QTY. -044	Part Number	DESCRIPTION
1	X		D4038-043	ANGLE ASSEMBLY, AFT, LH
2		X	D4038-044	ANGLE ASSEMBLY, AFT, RH
3	1		D4038-3	ANGLE, AFT, LH
4		1	D4038-4	ANGLE, AFT, RH
5	1		D4038-7	BLOCK
6		1	D4038-8	BLOCK
7	1		D4038-11	BLOCK
8		1	D4038-12	BLOCK
9	2	2	AN3-14A	BOLT
10	2	2	MS21042L3	NUT
11	4	4	NAS1149D0363J	WASHER

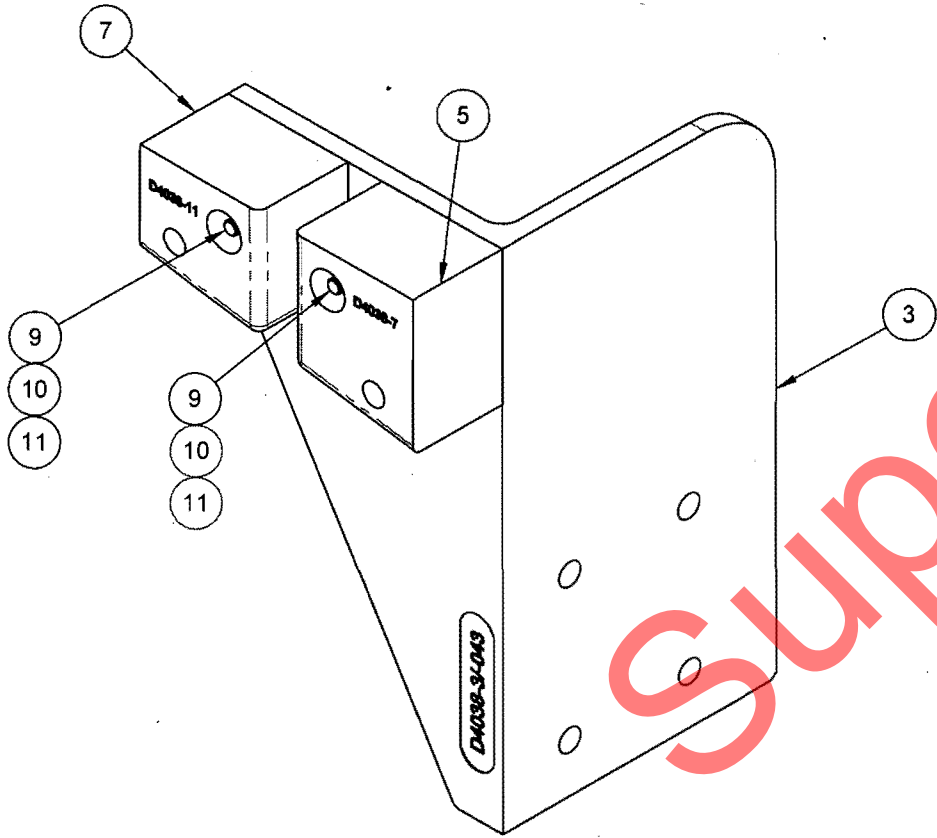



D4038-043 ANGLE ASSEMBLY, AFT, LH

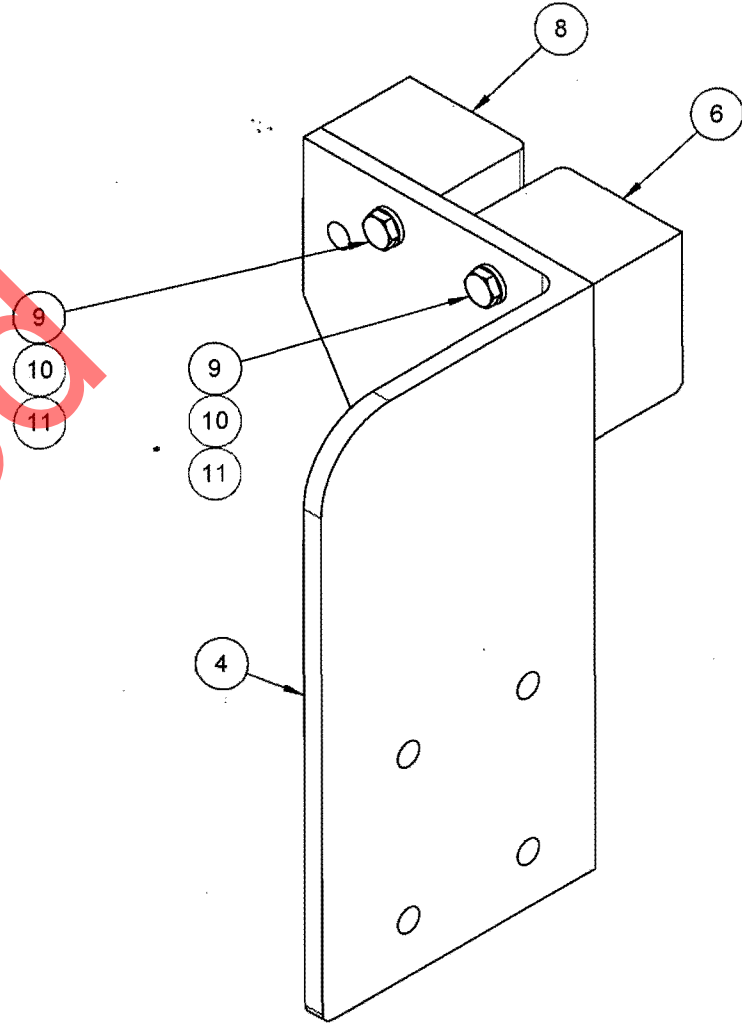

D4038-044 ANGLE ASSEMBLY, AFT, RH

- NOTES:
- 1) MATERIAL: N/A
 - 2) FINISH: POWDER COAT "WHITE" (4.3.5.1) PER DART QSI 005 4.3
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: N/A
 - 7) WEIGHT: -043 - 1.91 lbs
-044 - 1.74 lbs

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 2 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

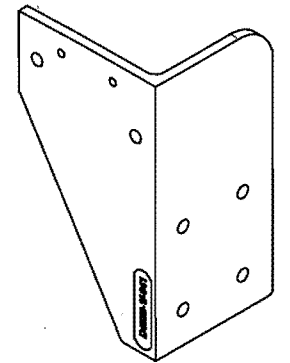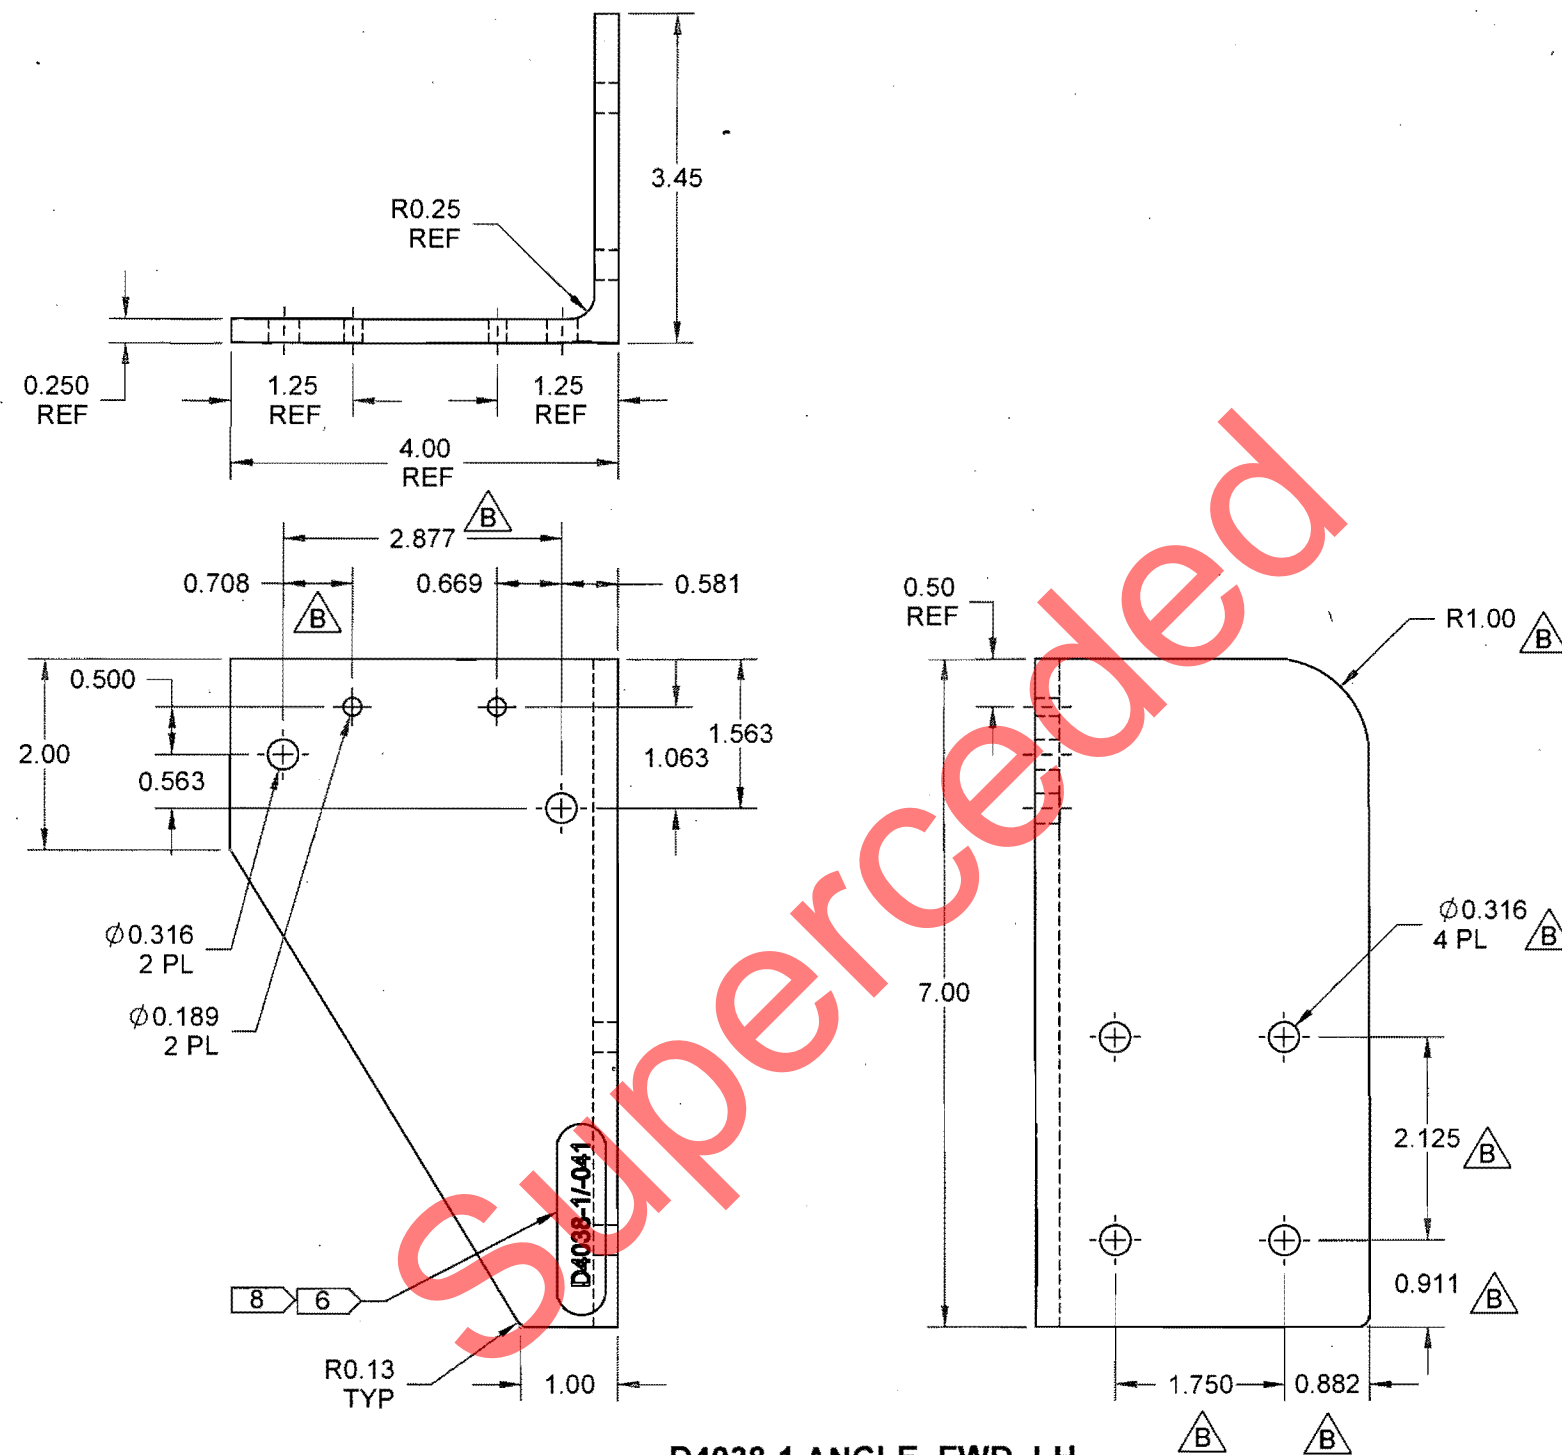


D4038-1 ANGLE, FWD, LH

RELEASED
2010-04-14
MD

- NOTES:**
- 1) MATERIAL: 6061-T6/T6510/T6511 ALUMINUM ANGLE, 4.000 X 4.000 X 0.250
PER AMS-QQ-A-200/8
REF DART SPEC M6061T6A4.000XW250
 - 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN (NEAR SIDE ONLY) TO MAX
DEPTH OF 0.010 IN 0.18 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
 - 7) WEIGHT: 1.04 lbs
 - 8) SPOT FACE MAX DEPTH OF 0.010 PRIOR TO MARKING


DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 3 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	<small>COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

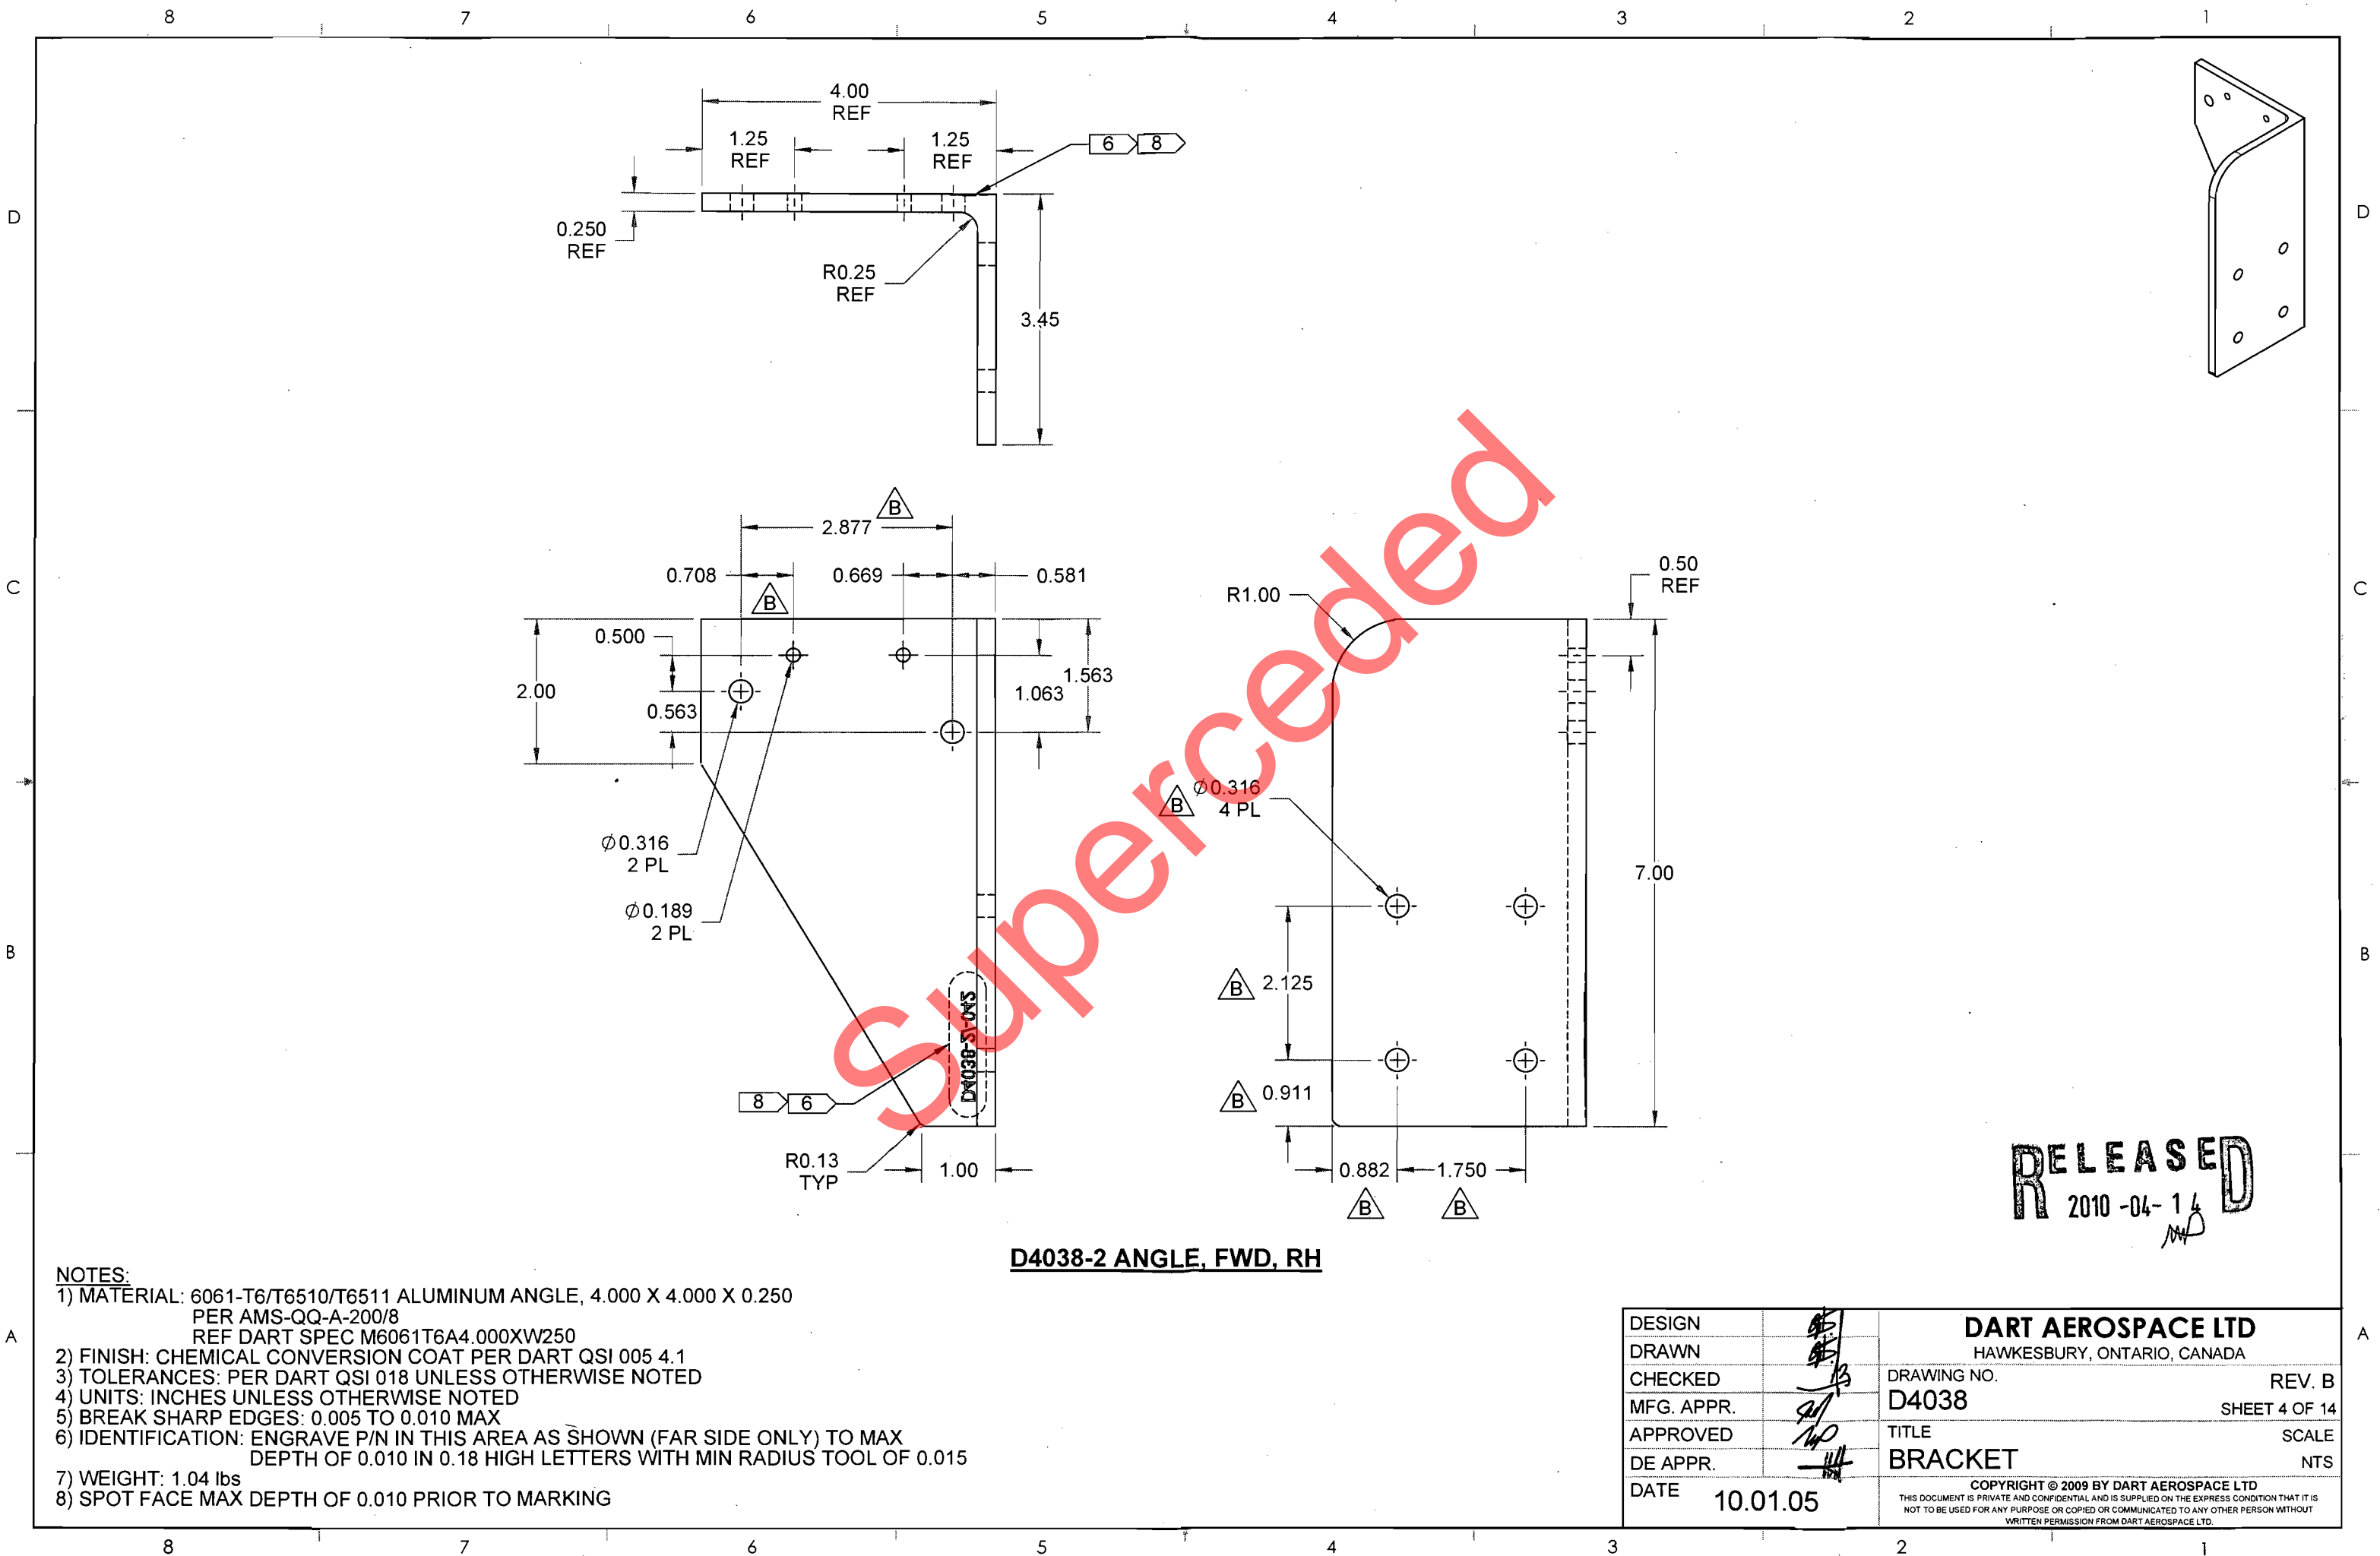

- NOTES:
- 1) MATERIAL: 6061-T6/T6510/T6511 ALUMINUM ANGLE, 4.000 X 4.000 X 0.250
PER AMS-QQ-A-200/8
REF DART SPEC M6061T6A4.000XW250
 - 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN (FAR SIDE ONLY) TO MAX
DEPTH OF 0.010 IN 0.18 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
 - 7) WEIGHT: 1.04 lbs
 - 8) SPOT FACE MAX DEPTH OF 0.010 PRIOR TO MARKING

D4038-2 ANGLE, FWD, RH

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 4 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

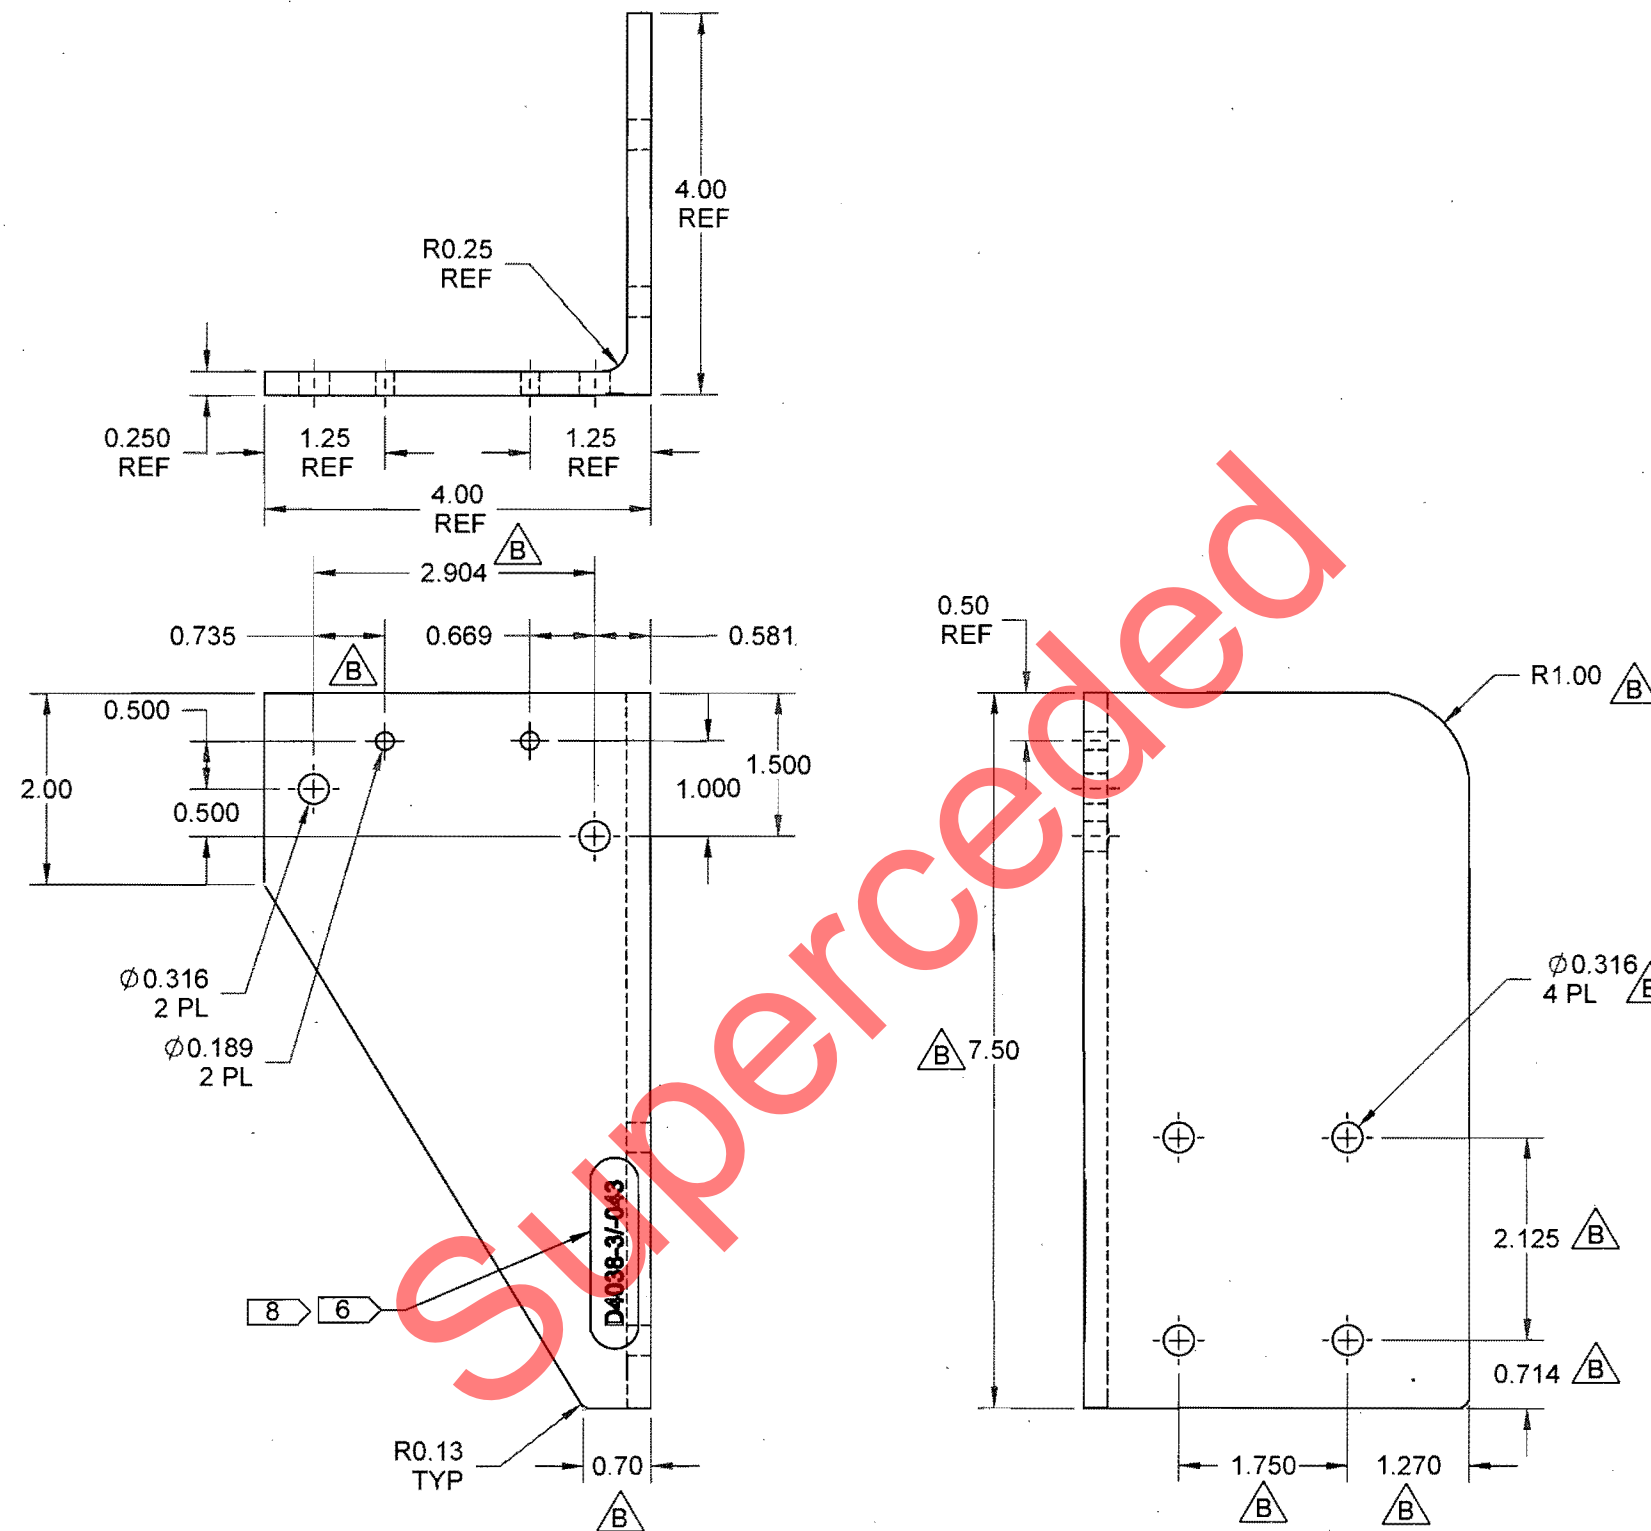




RELEASED
2010-04-14

NOTES:

- 1) MATERIAL: 6061-T6/T6510/T6511 ALUMINUM ANGLE, 4.000 X 4.000 X 0.250
PER AMS-QQ-A-200/8
REF DART SPEC M6061T6A4.000XW250
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN (NEAR SIDE ONLY) TO MAX
DEPTH OF 0.010 IN 0.18 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 1.19 lbs
- 8) SPOT FACE MAX DEPTH OF 0.010 PRIOR TO MARKING

D4038-3 ANGLE, AFT, LH

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 5 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	<small>COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

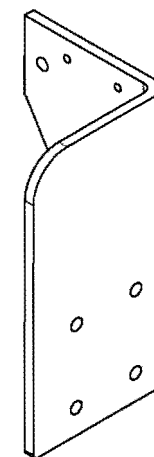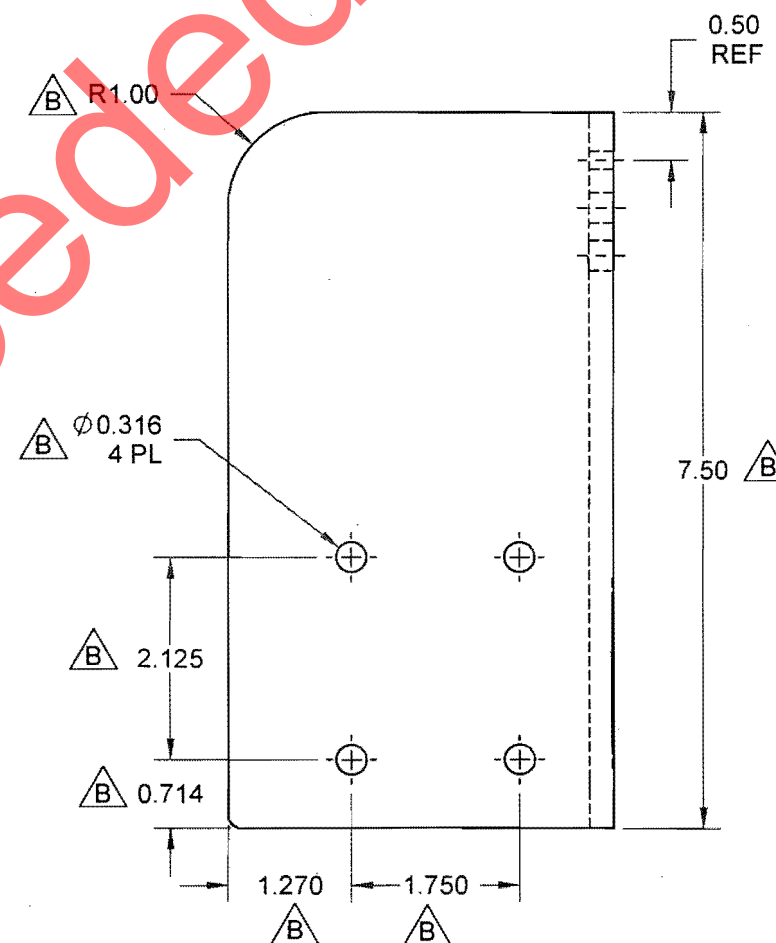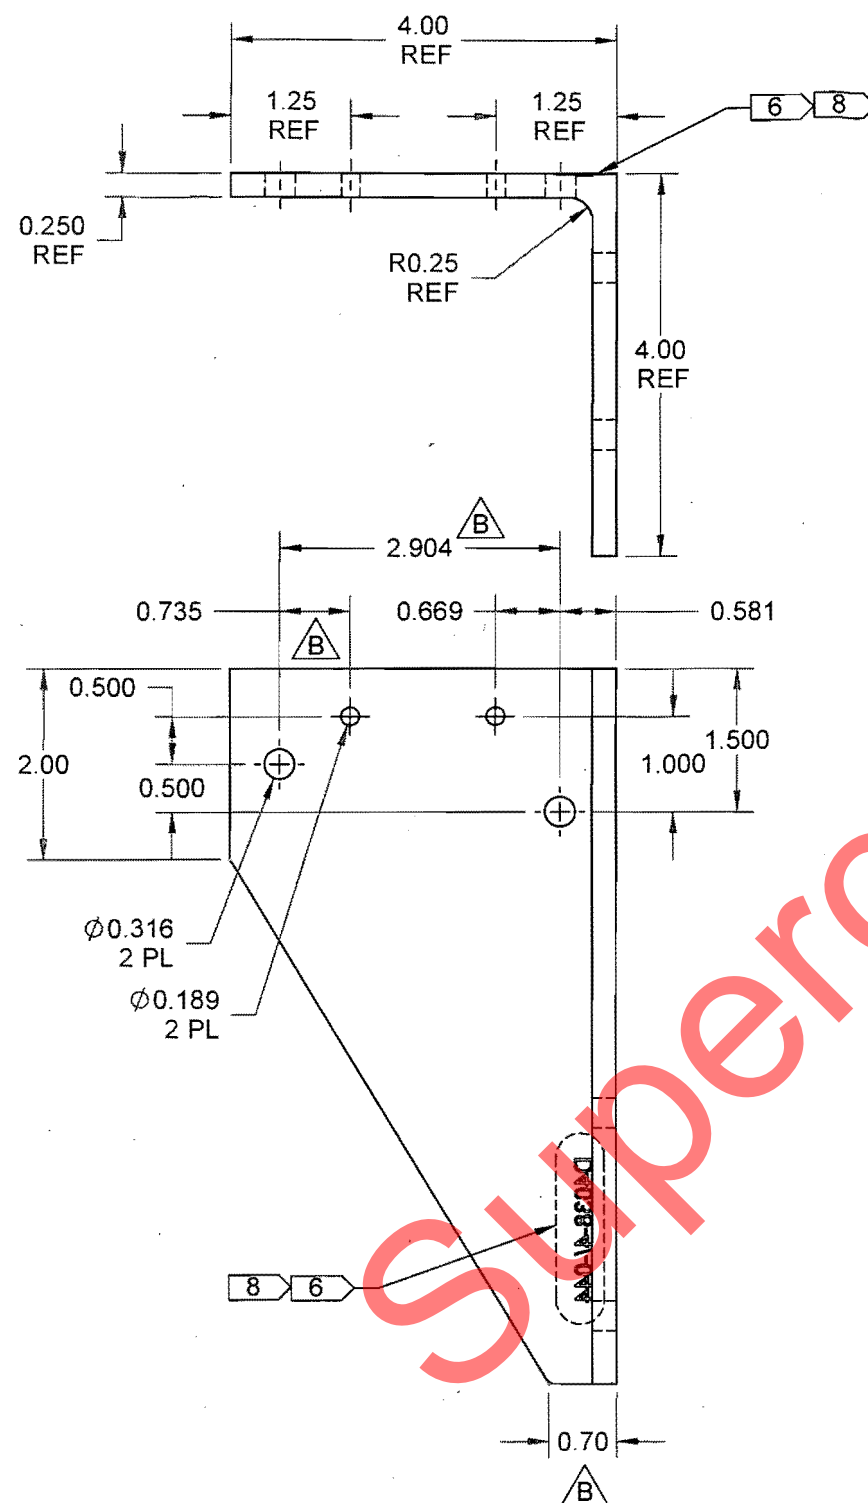



D4038-4 ANGLE, AFT, RH

NOTES:

- 1) MATERIAL: 6061-T6/T6510/T6511 ALUMINUM ANGLE, 4.000 X 4.000 X 0.250
PER AMS-QQ-A-200/8
REF DART SPEC M6061T6A4.000XW250
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN (FAR SIDE ONLY) TO MAX
DEPTH OF 0.010 IN 0.18 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 1.19 lbs
- 8) SPOT FACE MAX DEPTH OF 0.010 PRIOR TO MARKING

RELEASED
2010-04-14
MP

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 6 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	<small>COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD</small>	

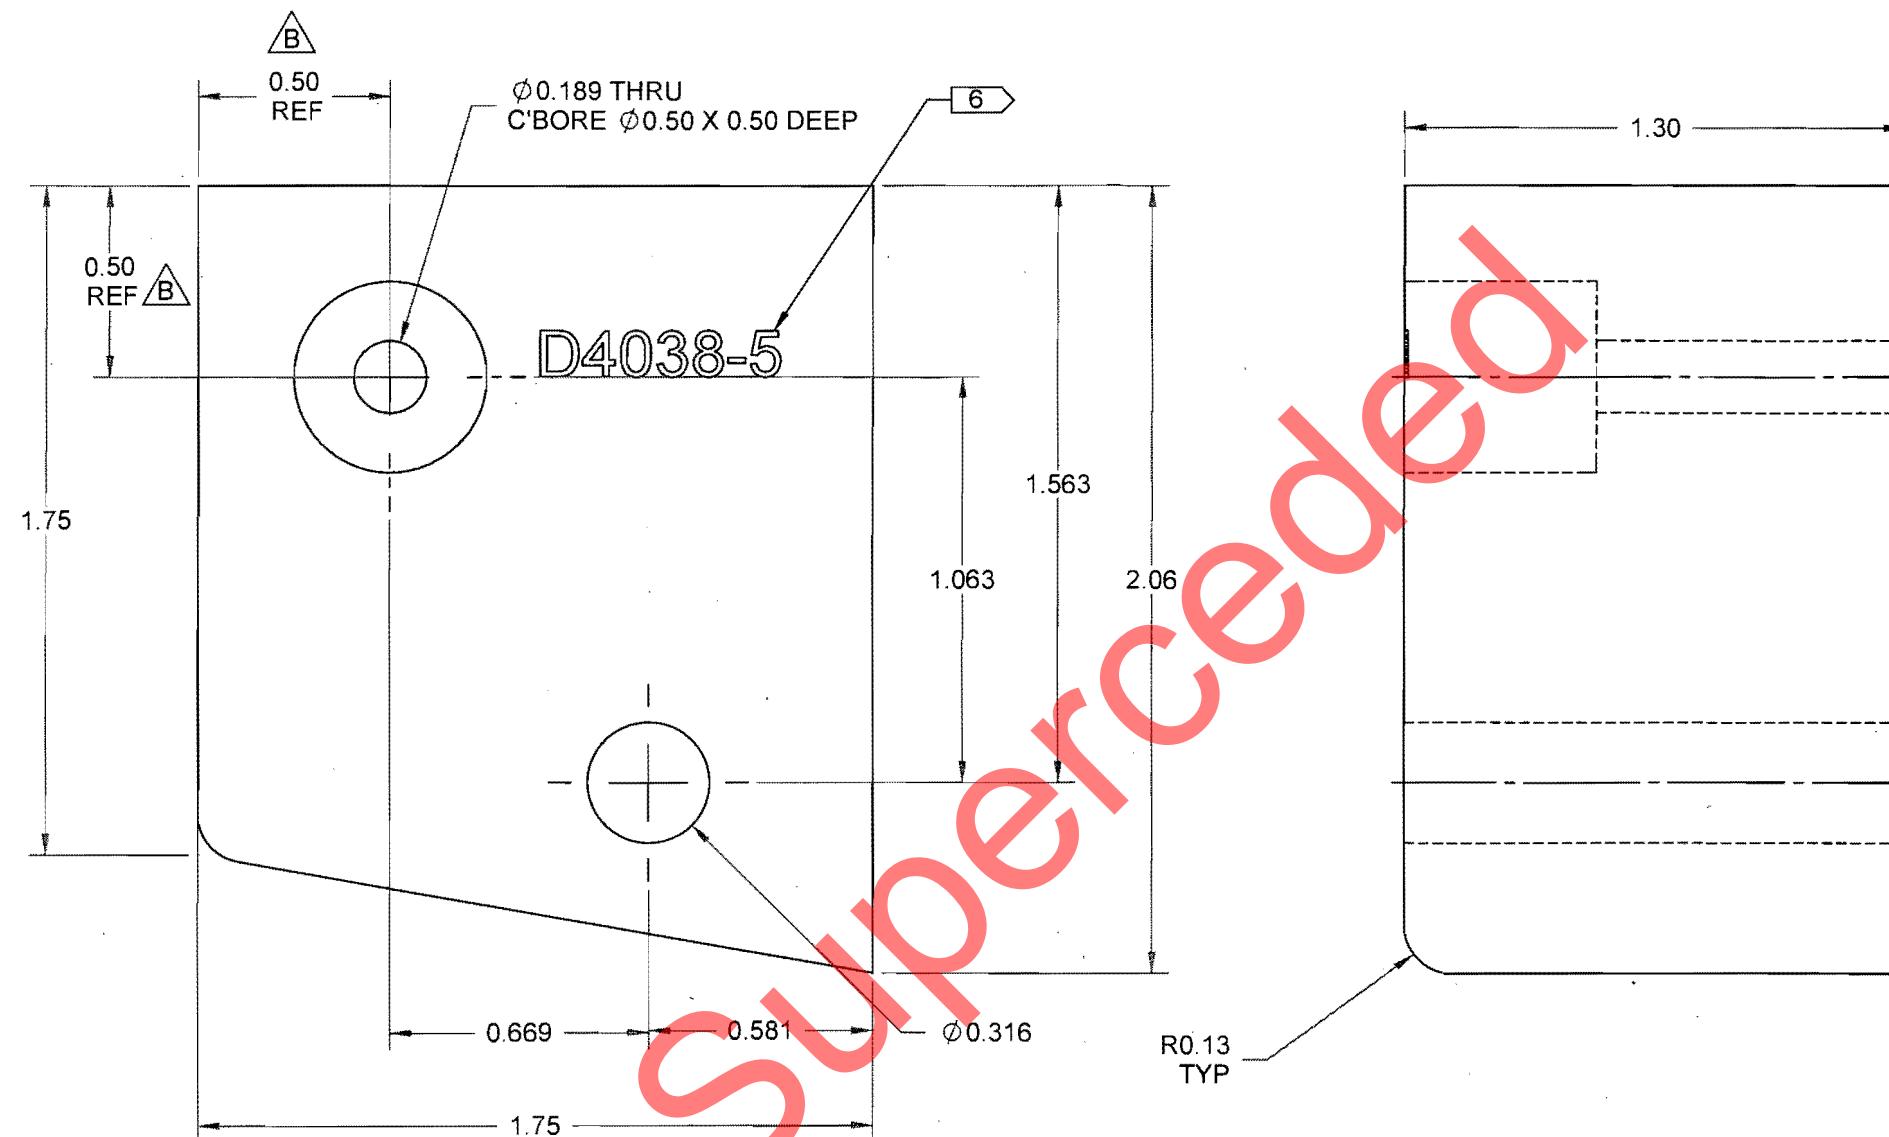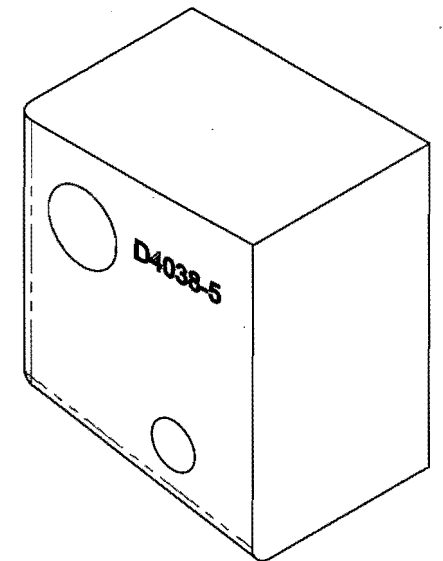



D4038-5 BLOCK

RELEASED
2010-04-14
MD

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.40 lbs

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 7 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

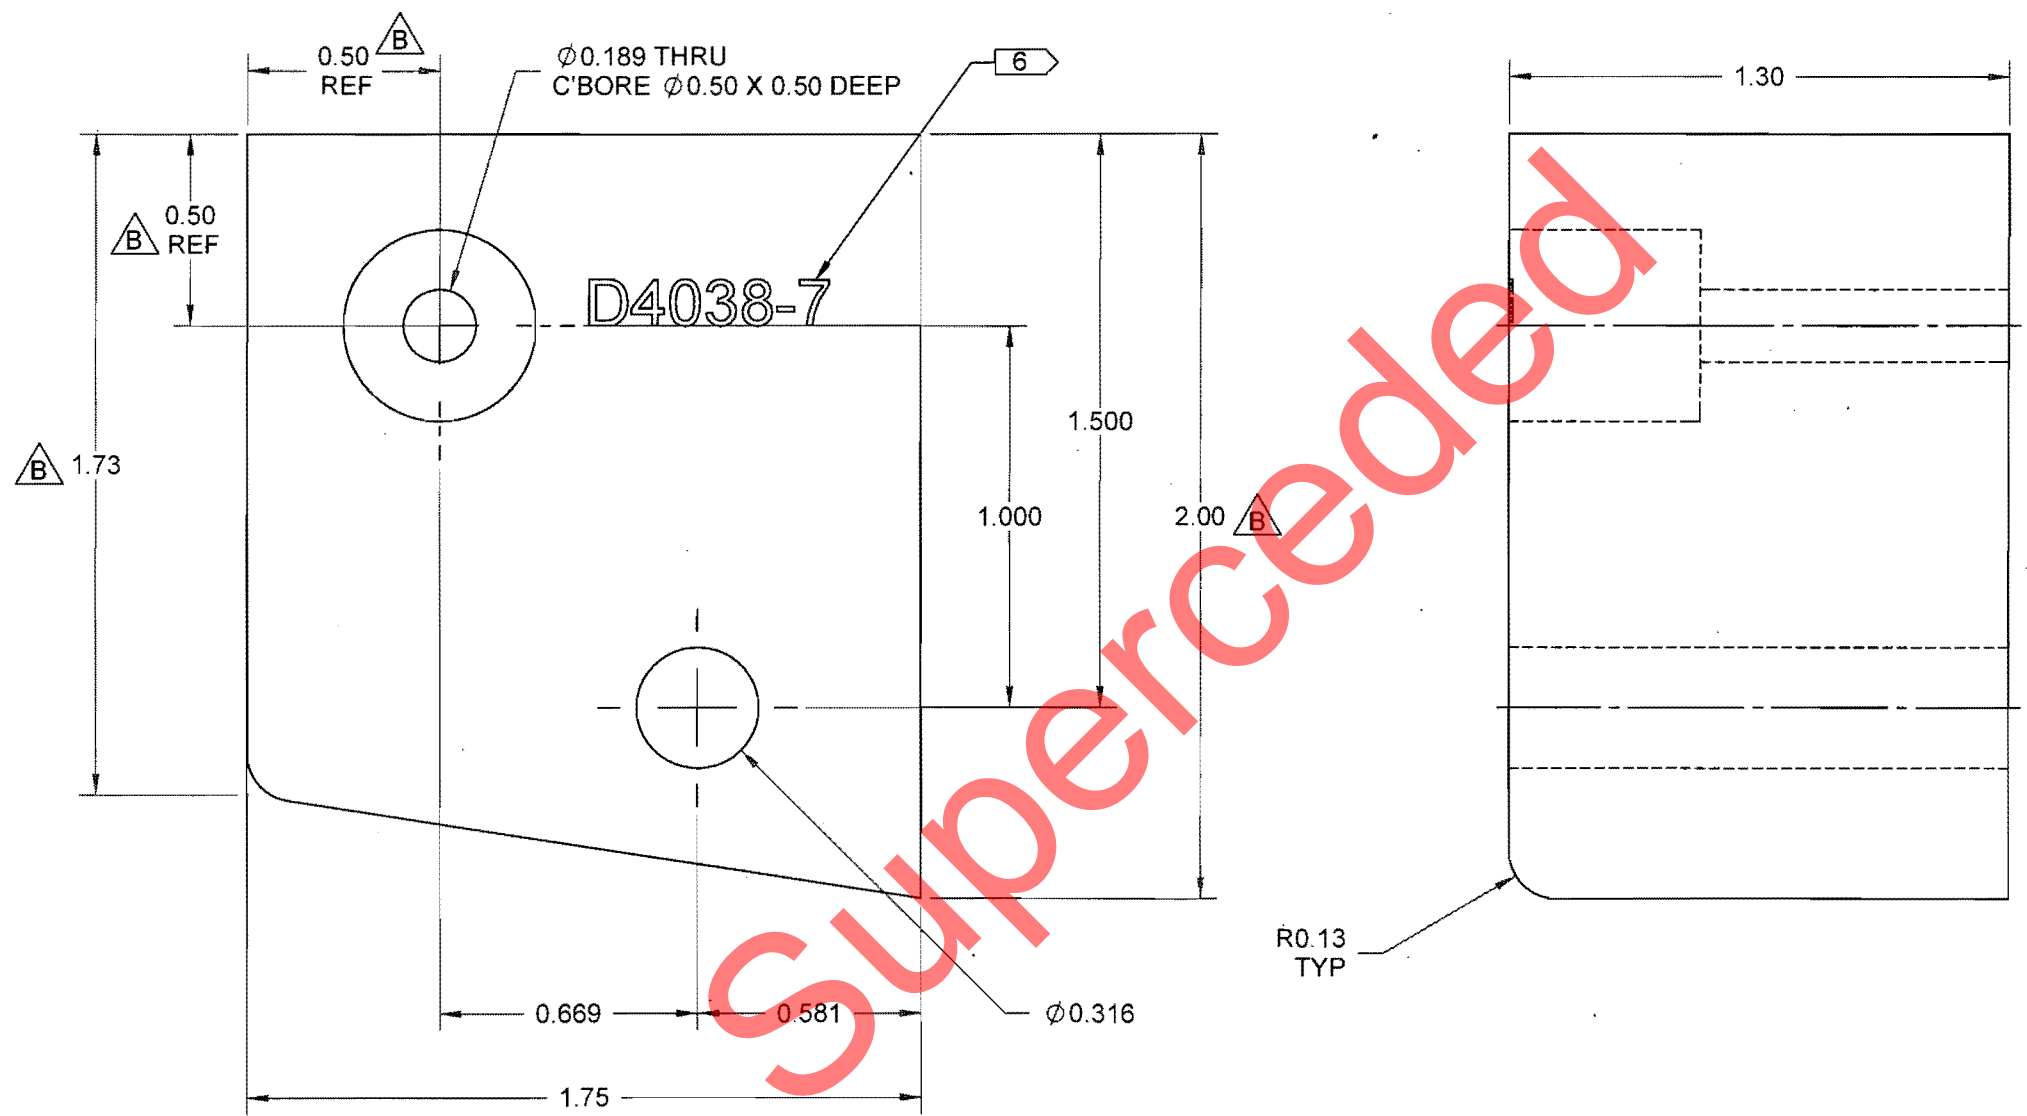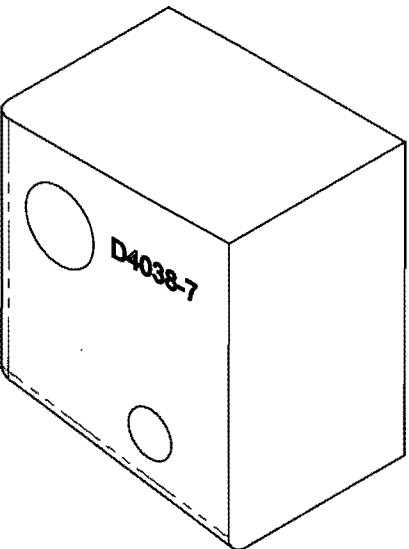

D4038-7 BLOCK

RELEASED
2010-04-14
md

- NOTES:**
- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
 - 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
 - 7) WEIGHT: 0.39 lbs

DESIGN	JS	DART AEROSPACE LTD	
DRAWN	JS	HAWKESBURY, ONTARIO, CANADA	
CHECKED	JS	DRAWING NO.	REV. B
MFG. APPR.	JS	D4038	SHEET 9 OF 14
APPROVED	JS	TITLE	SCALE
DE APPR.	JS	BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL, AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

8

7

6



5

4

3

2

1

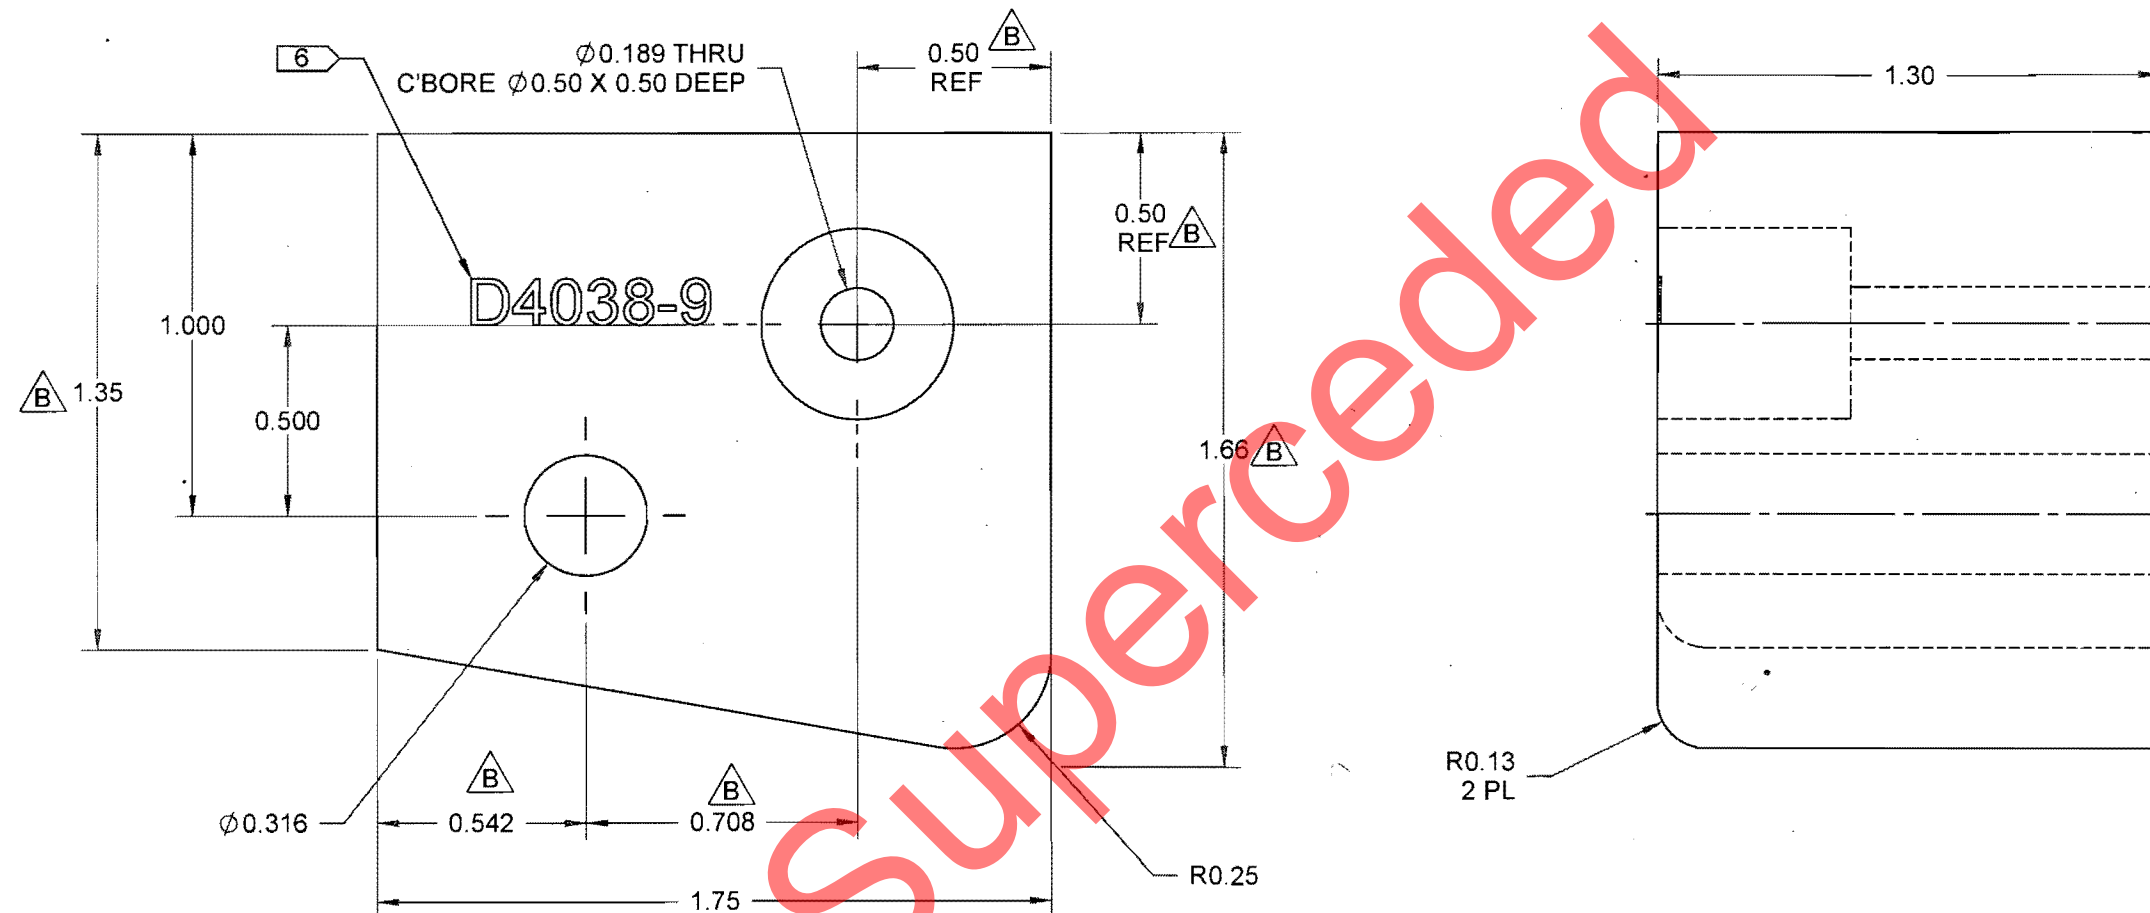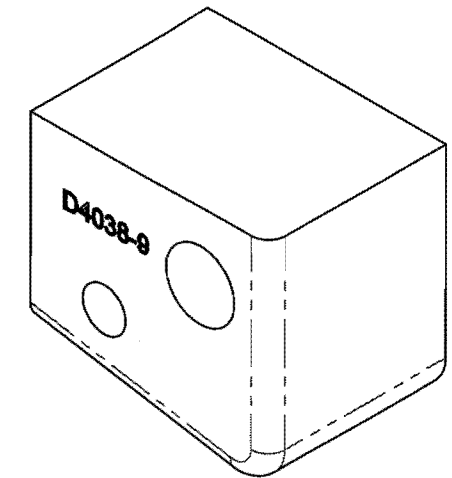









D4038-9 BLOCK

RELEASED
2010-04-14
MD

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.31 lbs

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 11 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

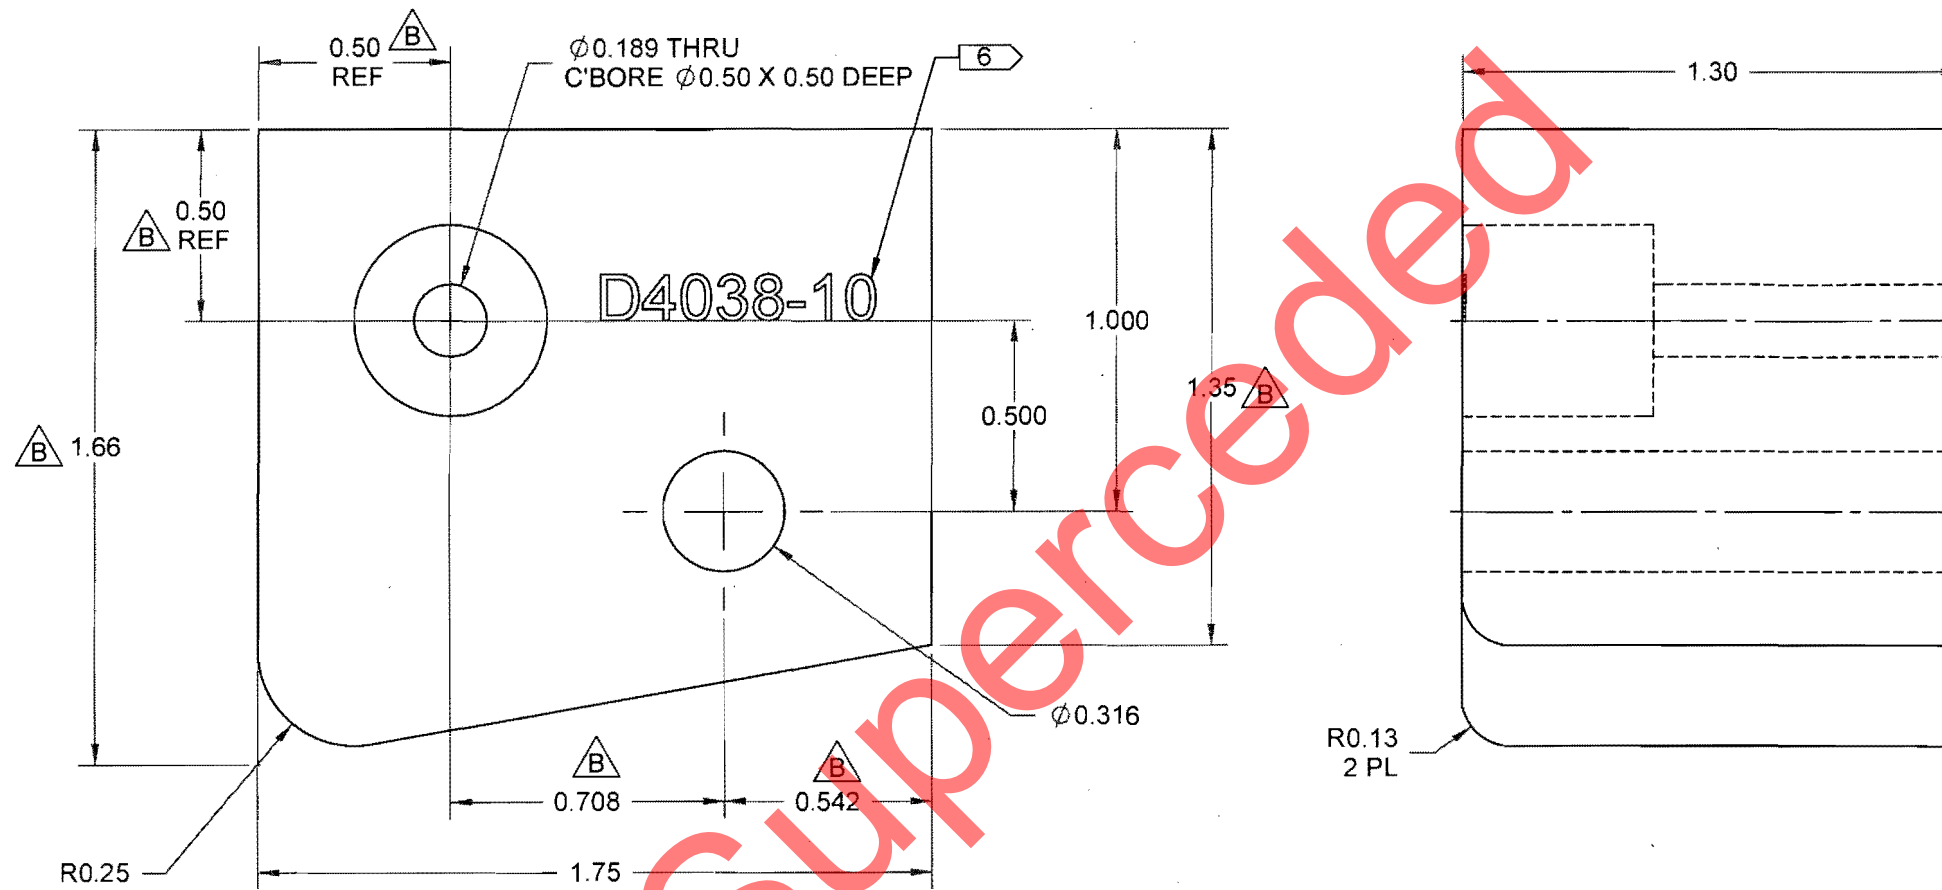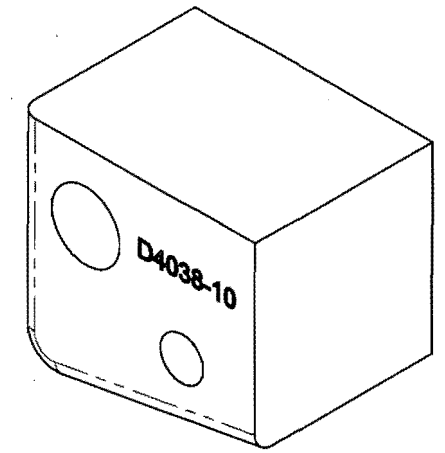



D4038-10 BLOCK

RELEASED
2010-04-14
MD

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.31 lbs



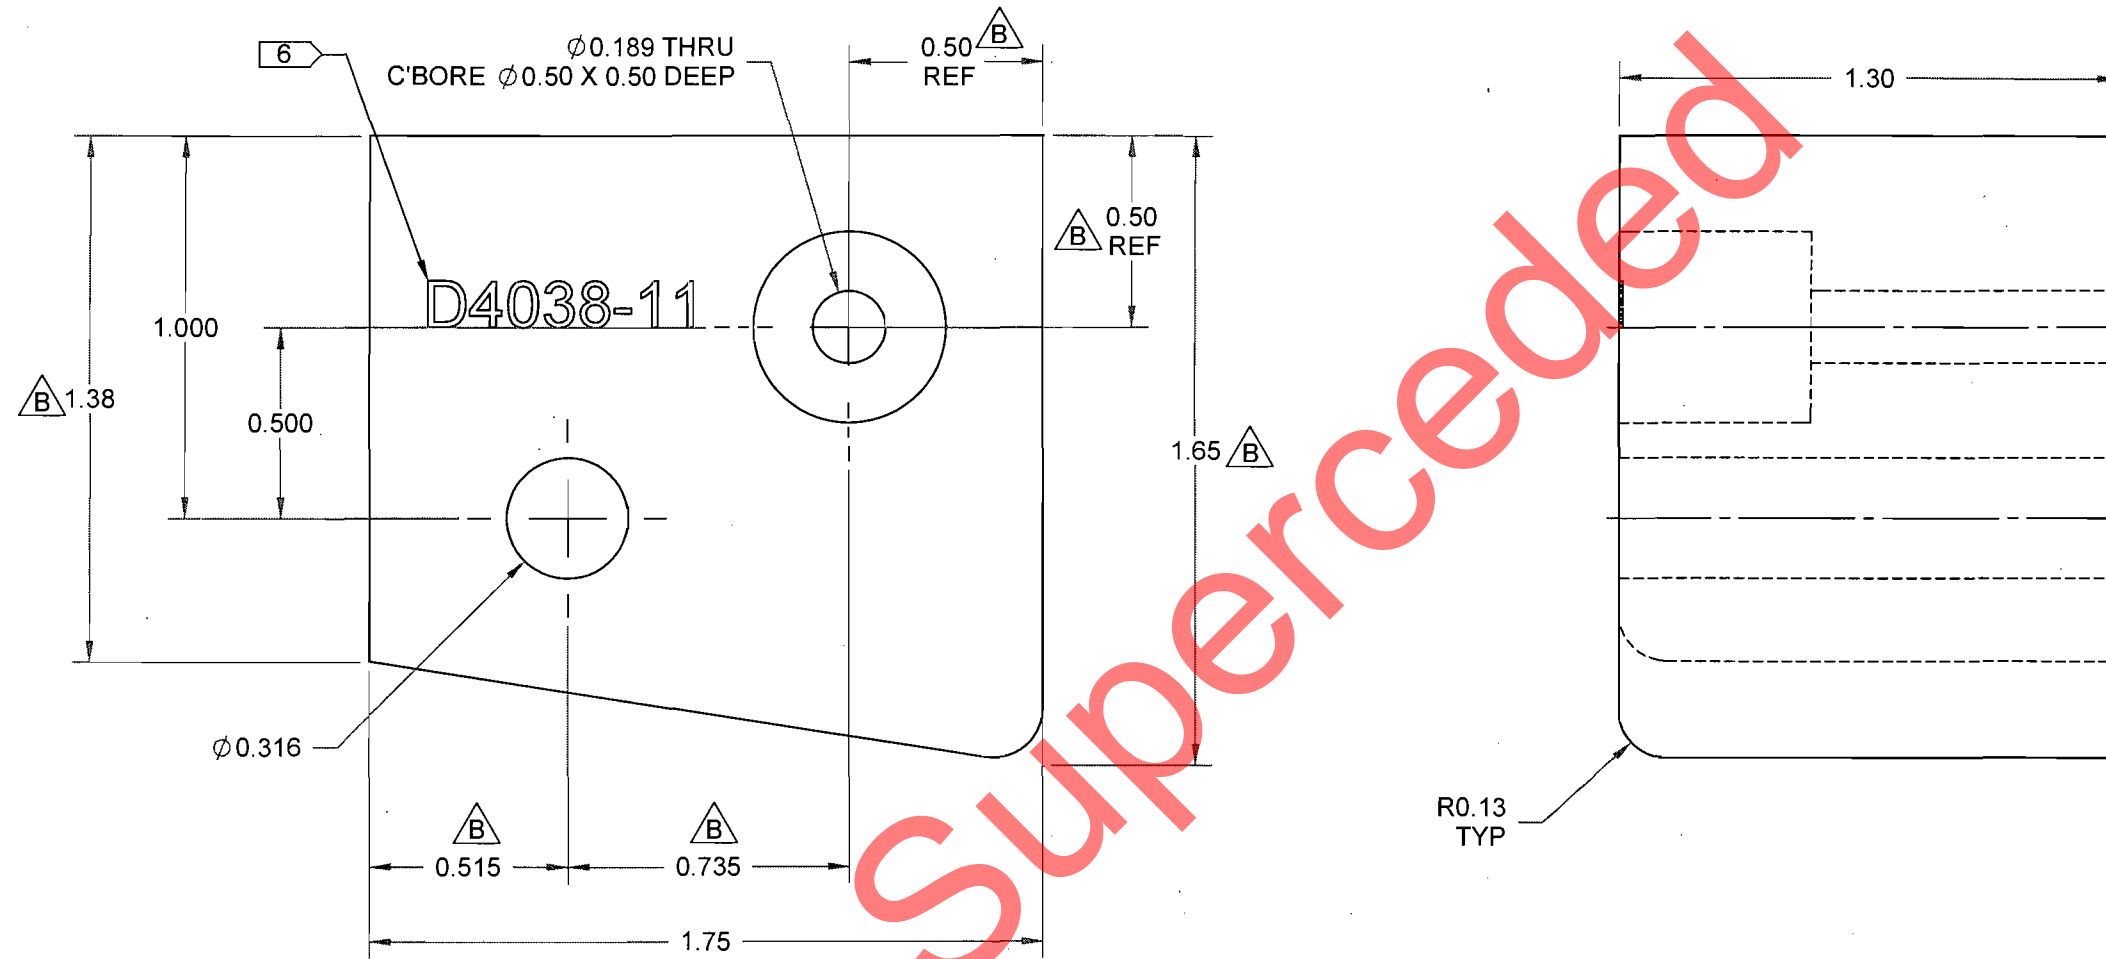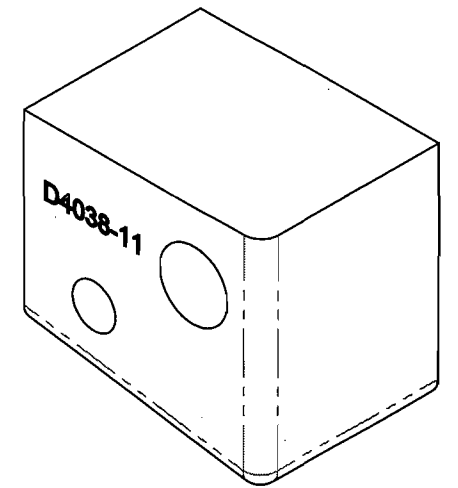



DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 12 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			





D4038-11 BLOCK

RELEASED
2010-04-14

- NOTES:**
- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
 - 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
 - 7) WEIGHT: 0.31 lbs

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 13 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

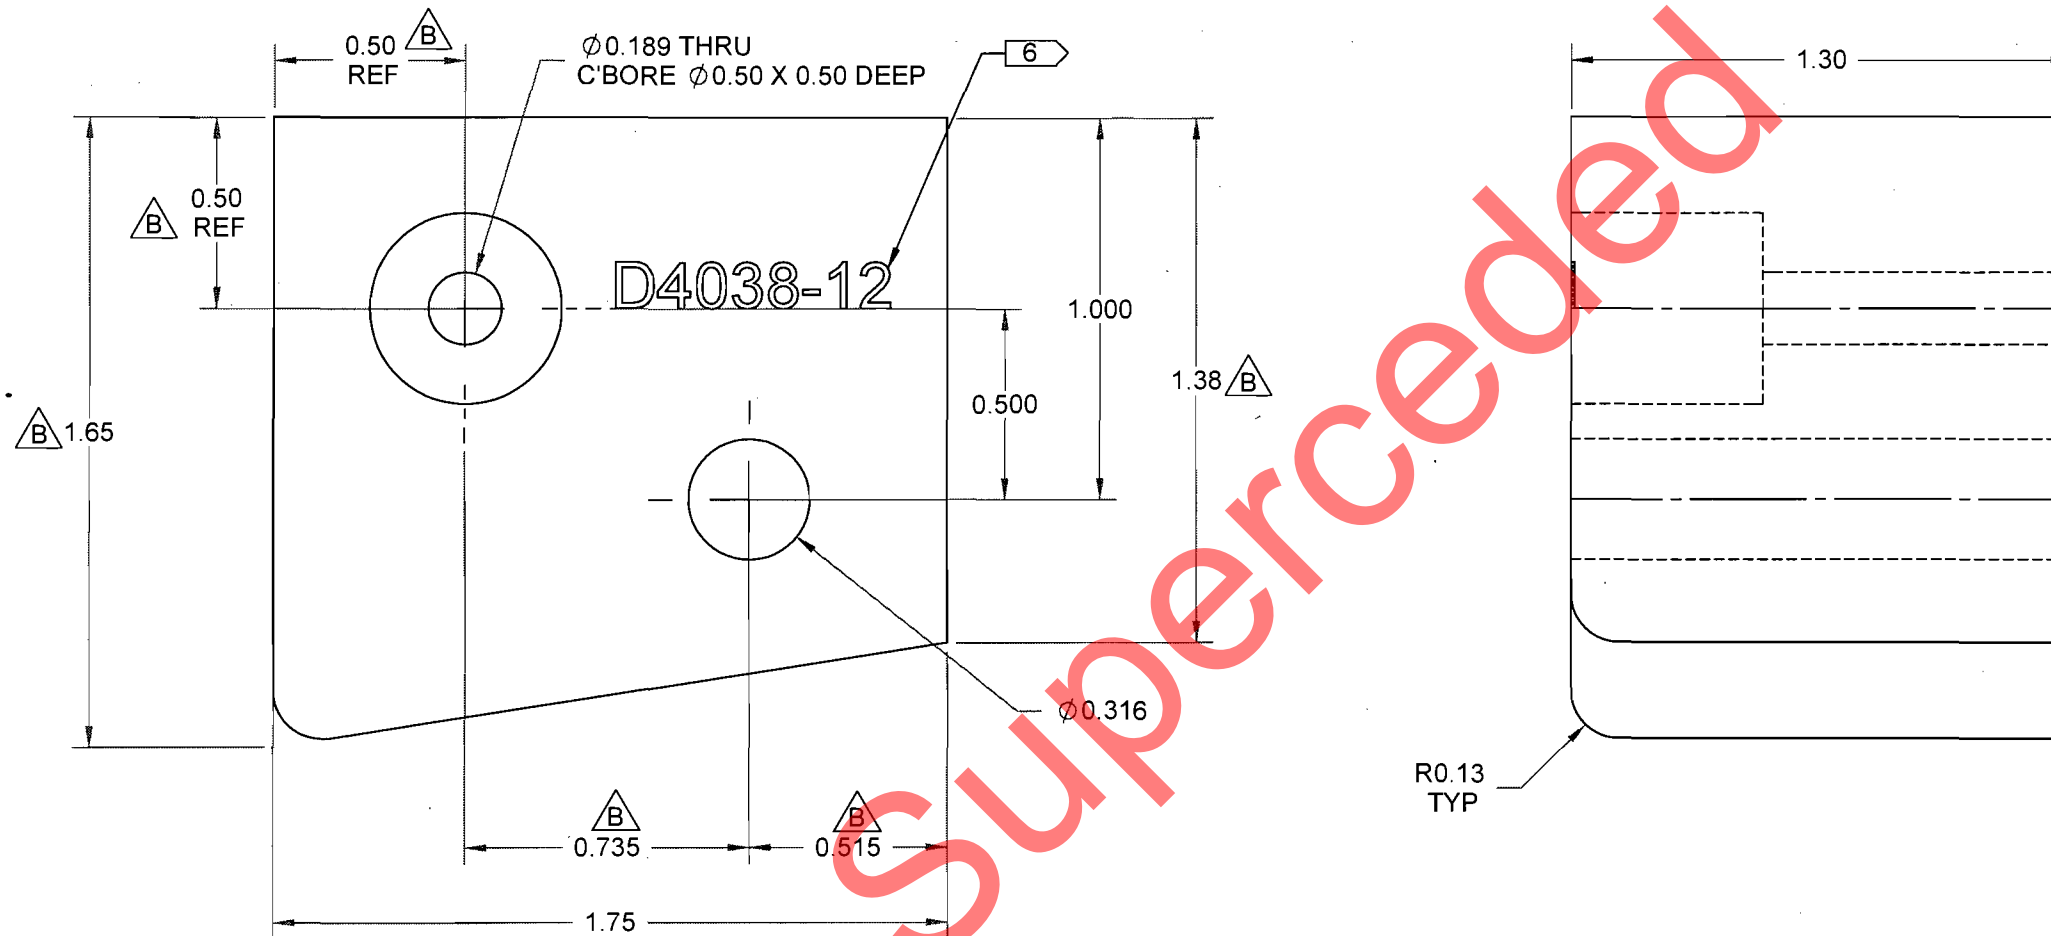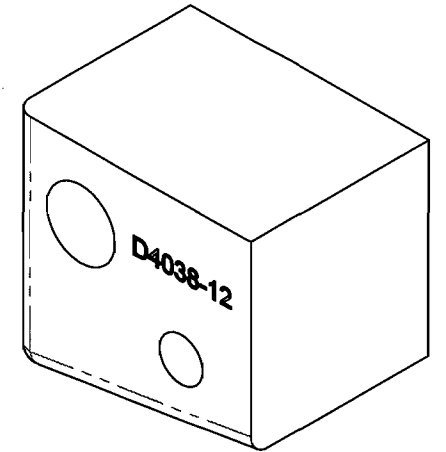







D4038-12 BLOCK

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.31 lbs

RELEASED
2010-04-14
WP

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. B
MFG. APPR.		D4038	SHEET 14 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	10.01.05	COPYRIGHT © 2009 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			